


**CAMERIO *TeleEAR*** ascertains customers' security with remote audio monitoring!

Equipped *TeleEye* Video Transmitter with **CAMERIO *TeleEAR*** Audio Transmitter (ATU-1), users are provided with all-in-one remote audio and video security solution through the Internet, LAN, PSTN and ISDN.

**CAMERIO *TeleEAR*** can support multiple audio channels, make remote public addressing and record audio in the hard disk of the PC.

## Features

- Half-duplex digital audio transmission
- 4 audio inputs, 1 audio output
- Programmable audio recording
- Recorded audio retrieval by time parameters
- Remote public addressing
- Independent audio & camera switching

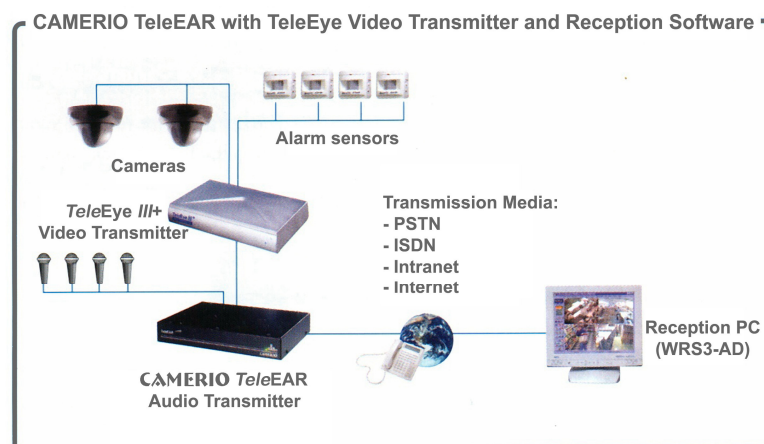

## Specifications

ENVIRONMENTAL CONDITION	AMBIENT OPERATING TEMPERATURE	+10°C ~ +50°C
	AMBIENT OPERATING HUMIDITY	< 90% (no condensation)
SPECIFICATION	CHANNEL 1	Line in, mic in (selectable)
	CHANNEL 2-4	Line in
	LINE IN	Input Impedance: 47kΩ, unbalanced, 1Vp-p, bandwidth: 200Hz-3.5kHz
	MIC IN	Input impedance: 1.2kΩ, unbalanced, 50mVp-p, bandwidth: 200Hz-3.5kHz
	LINE OUT	Output Impedance: 300Ω, unbalanced, 1Vp-p
	POWER	9-12Vdc, 4W (maximum)
	MECHANICAL DESIGN	CONSTRUCTION
COLOR		Black finish
DIMENSION		255mm x 188mm x 43mm
WEIGHT		1.1kg



**TeleEye Group**  
Hong Kong (Head Office)

### Signal Communications Limited

16/F, Millennium City III, 370 Kwun Tong Road, Kowloon, Hong Kong  
 International: (852) 2995 5996      Hong Kong: (852) 2995 5992  
 Fax: (852) 2995 5901      Email: info@TeleEye.com

**China**  
**Japan**  
**Singapore**  
**U.K.**

Tel: (86) 755 2671 2122      Email: info@TeleEye.com.cn  
 Tel: (81) 42 742 2690      Email: info@CAMERIO.com.jp  
 Tel: (65) 6745 3921      Email: sales@TeleEye.com.sg  
 Tel: (44) 118 953 3707      Email: ukinfo@TeleEye.com