




Features

- Resolution: 420TV Lines
- 1.0 Lux Sensitivity
- Auto Iris / Electronic Shutter Control
- Back Light Compensation

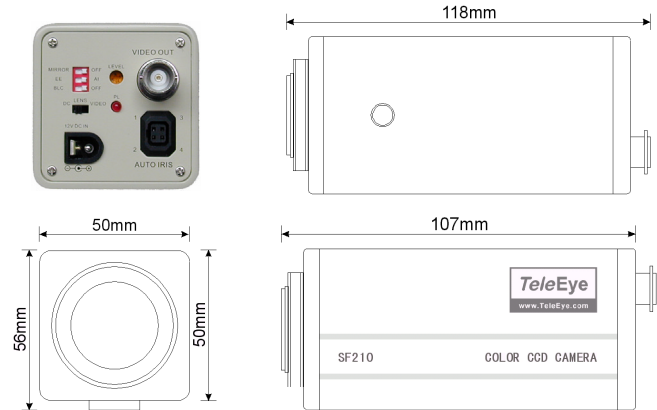

Specifications

MODEL	SF210P	SF210N
PICK UP DEVICE	1/3" interline transfer CCD	
PICTURE ELEMENTS	500 (H) x 582 (V)	510 (H) x 492 (V)
SENSING AREA	4.9mm x 3.7mm	
HORIZONTAL RESOLUTION	420TV lines	
AUTO IRIS LENS	Video / DC switchable	
LENS MOUNT	CS mount (C mount adaptor option)	
ELECTRONIC SHUTTER CONTROL	On / Off switchable	
BACK LIGHT COMPENSATION	On / Off switchable	
ELECTRONIC SHUTTER	1/50 (1/60) - 1/100,000 sec	
S/N RATIO	More than 48dB	
MIN. ILLUMINATION	1.0 Lux / F1.2	
VIDEO OUTPUT	1.0Vp-p, 75Ω	
POWER SOURCE	DC12V / 100mA	
VIDEO OUT	BNC	
OPERATING TEMPERATURE	-10°C ~ +50°C	
NET WEIGHT	230g	
DIMENSION	50mm x 56mm x 118mm	

TeleEye Group

Hong Kong (Head Office)

Signal Communications Limited

Units 216-7, Tech Centre, 72 Tat Chee Avenue, Kowloon, Hong Kong

Tel: (852) 2319 2151 Fax: (852) 2319 2550 Email: info@TeleEye.com

China

Japan

Singapore

U.K.

Tel: (86) 755 2671 2122

Tel: (81) 42 742 2690

Tel: (65) 6745 3921

Tel: (44) 118 953 3707

Email: info@TeleEye.com.cn

Email: info@CAMERIO.com.jp

Email: sales@TeleEye.com.sg

Email: ukinfo@TeleEye.com

Features and specifications are subject to change without prior notice.

Copyright© 2003 Signal Communications Limited. TeleEye is a trademark of Signal Communications Limited and is registered in China, Hong Kong, U.S. and other countries.

All other trademarks are the property of their respective owners.